



HTC Wildfire S Teardown

simply teardown of htc wildfire s

Written By: sowa705



Step 1 — HTC Wildfire S Teardown



- turn off your phone
- remove back cover and battery

Step 2




- remove 5 torx t5 screws


Step 3




- remove back cover using a spudger

 you can use back cover of your phone


Step 4

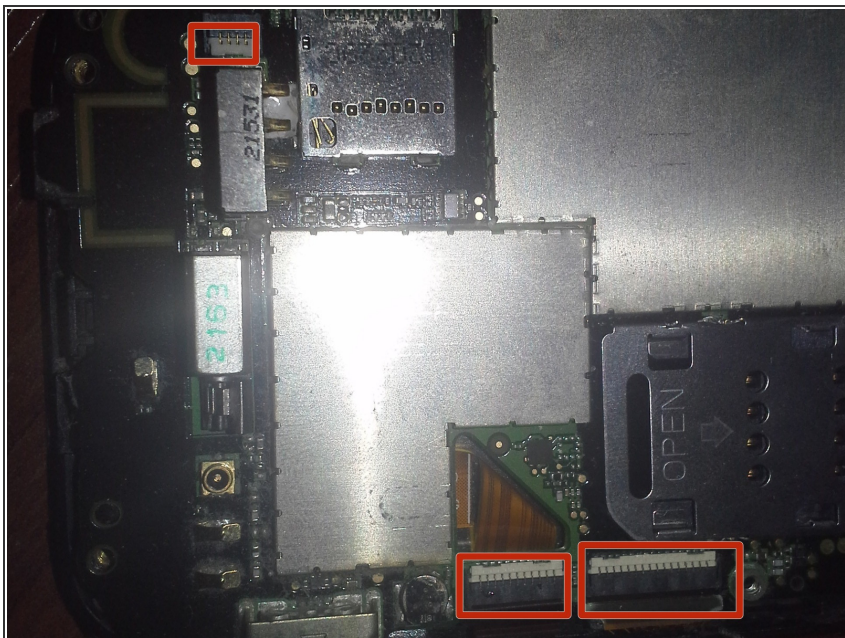

- unplug three ribbon cables from motherboard

 ribbon cables are easy to damage

Step 5

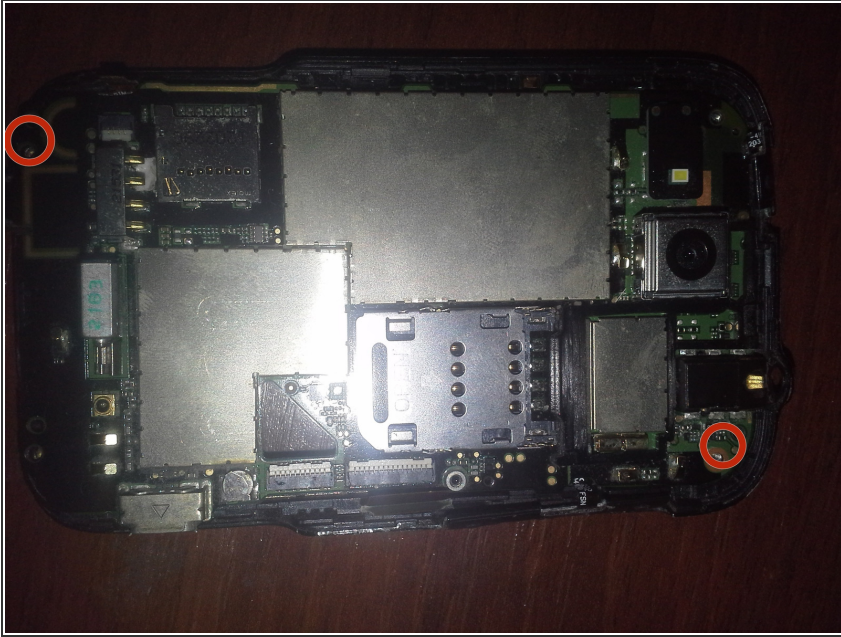

- remove 2 phillips screws and remove motherboard

Step 6



- ❗ black ribbon cable is glued to screen
- remove glue between black ribbon cable and screen

Step 7



- use spudger to remove screen

Step 8



- to assemble phone follow the instructions in reverse order

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-01 09:36:10 PM.